

# Vanne Passage Direct

Réf : 0131


**ACIER - PN25 -**

**Brides**

**Sièges Paralleles**

**97/23/CE Catégorie III**

Ø	D	L	H	V	Ps	Pds	
	mm				bar	kgs	
8	1/4						
10	3/8						
15	1/2						
20	3/4						
25	1						
32	1 1/4						
40	1 1/2						
50	2	50	250	348	160	25	20,0
65	2 1/2	65	270	390	160	25	25,0
80	3	80	280	450	240	25	35,0
100	4	100	300	530	260	25	47,0
125	5	125	350	650	260	25	75,0
150	6	150	375	760	320	25	90,0
200	8	200	425	960	320	25	180,0
250	10	250	450	1160	500	25	320,0
300	12	300	500	1420	500	25	400,0
350	14						
400	16						
450	18						
500	20						
600	24						

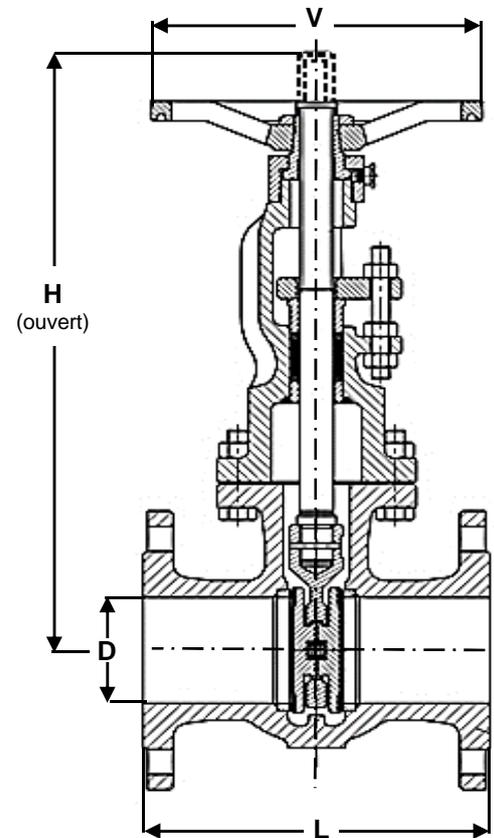

## Conditions de service maximum / Maximum working conditions

**Température max. /Max. temperature** 425°C **Pression max. / max. pressure** 25B  
(ATTENTION ne s'agissant pas d'une pression / température associées, elle peut être déterminée par nos soins)

## Matières / Matériaux

**CORPS / BODY** Acier GSC 25  
**OPERCULE / WEDGE** Acier GSC 25 + stellite  
**TIGE / STEM** Inox A182 F6  
**SIEGES /SEAT** Stellite  
**P.ETOUPE / G.PACKING** Graphite

## Options / Options

