

Vanne Passage Direct

Réf : 0133


ACIER - PN40 -

Brides

Sièges Paralleles

97/23/CE Catégorie III

Ø	D	L	H	V	Ps	Pds	
	mm				bar	kgs	
8	1/4						
10	3/8						
15	1/2						
20	3/4						
25	1						
32	1 1/4						
40	1 1/2						
50	2	50	250	443	175	40	31,0
65	2 1/2	65	270	475	200	40	35,0
80	3	80	280	525	250	40	40,0
100	4	100	300	605	250	40	65,0
125	5	125	350	715	280	40	95,0
150	6	150	375	845	350	40	130,0
200	8	200	425	1180	450	40	300,0
250	10	250	450	1410	500	40	450,0
300	12	300	500	1660	600	40	650,0
350	14						
400	16						
450	18						
500	20						
600	24						

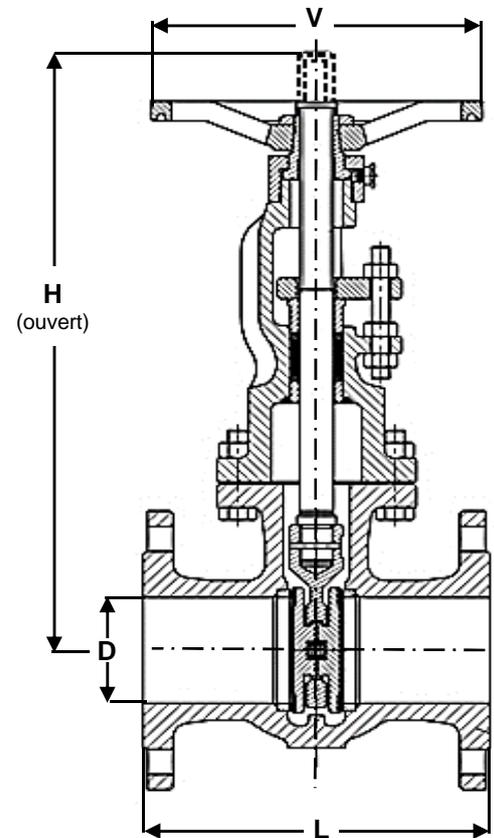

Conditions de service maximum / Maximum working conditions

Température max. /Max. temperature 425°C

Pression max. / max. pressure 40B

(ATTENTION ne s'agissant pas d'une pression / température associées, elle peut être déterminée par nos soins)

Matières / Matériaux

CORPS / BODY	Acier GSC25
OPERCULE / WEDGE	Acier GSC25 + stellite
TIGE / STEM	Inox A182 F6
SIEGES /SEAT	Stellite
P.ETOUPE / G.PACKING	Graphite

Options / Options

